

2,4
GHz

RGB
+ W




CONTROLADOR RGBW SERIE V RGBW CONTROLLER SERIE V



Sistema de control RGBW compuesto de emisor V4 y receptores. Emisión a 2,4GHz para evitar interferencias. Receptores RF inalámbricos sin necesidad de cablear entre ellos.

RGBW Control system is composed by V4 transmitter with receiver. Issued to 2,4GHz to avoid interferences. Wireless receivers do not need to be wired up to each other. Can be possibility to control until 8 independent zones.

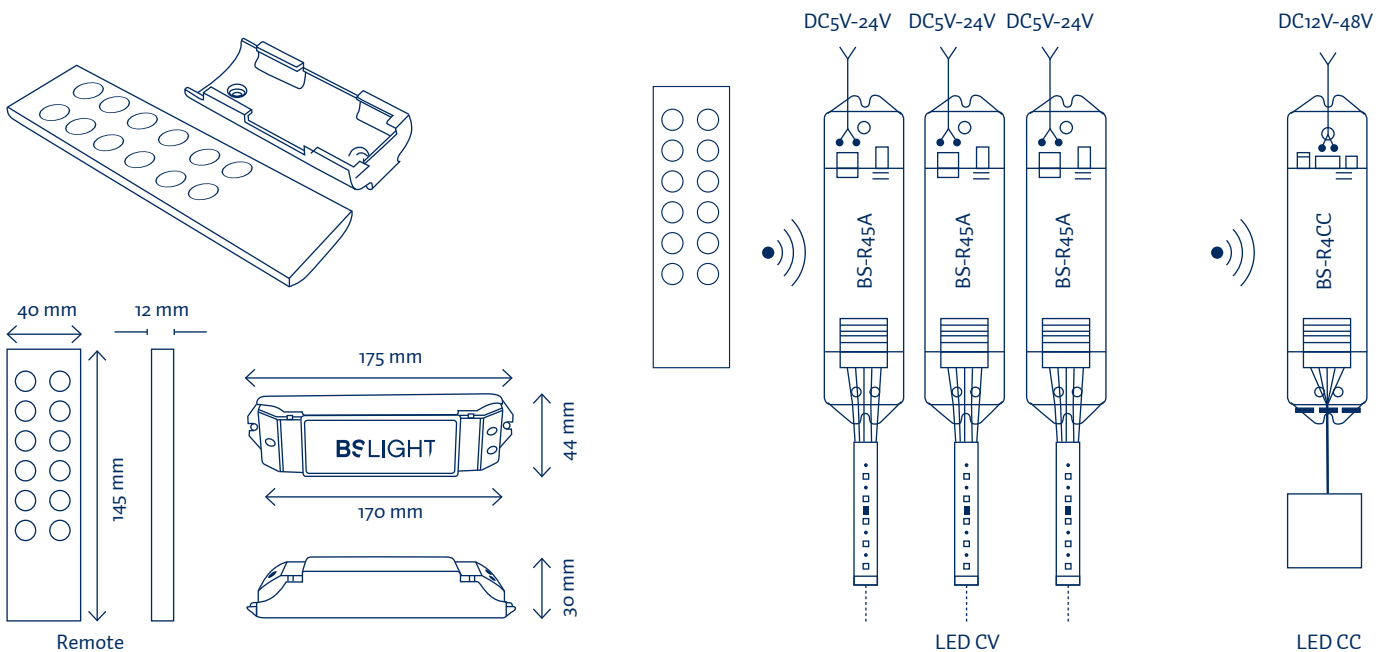

	ALIMENTACIÓN POWER SUPPLY	CARGA MÁX. MAX.CHARGE	MEDIDAS MEASURE	COMENTARIO REMARKS
BS-V4	3VDC (CR2032)	-	145x40x12	Emisor RF 2,4GHz / RF transmitter
BS-R45A	5-24VDC	5A x 4 canales / channels	175x44x30	Receptor RF tensión constante para BS-V4 / Constant voltage RF receiver to BS-V4
BS-R4CC	12-48VDC	350/700/1050mA x 4 canales / channels	175x44x30	Receptor RF corriente constante para BS-V4 / Constant current RF receiver to BS-V4