

LED light maintenance rate : 1000Hs <5% (25°C)

BS LIGHT

HIGH POWER OUTDOOR SPOTLIGHT



Item No: PY6X2

Input Voltage (V) : 240VAC 50/60Hz

Operating Current(mA) : 64

Power(W) : 13.5±0.3W

Light Source : 6*2W OSRAM LED

Lumen(Lm) : 680

Color Temperature(K) : 3000

Wavelength(nm) : /

LED beam angle() : 80 °



Full light beam angle() : 20

LED Power(W) : 10



Reality of color(Ra) : ≥80

Ground impedance (MΩ) : >20

High voltage insulation(Kv) : 0.5(3S)



PY6X2-BF



2.Fixture Specification

Weight(Kg) : ~ 1.5

Full fixture size(mm) : D×H=130×184mm

Cover/Glass (mm) : Alum-φ130*38mm/φ111.2*4.0mm

Housing (mm) : Alum-φ130*38mm

Gasket : Silicon , 45 degree

Cable : 3M H05RN-F 3×1.0MM²

IP grade : IP65

3.Quality Warranty

LED light maintenance rate : 1000Hs <5% (25°C)

BS LIGHT

HIGH POWER OUTDOOR SPOTLIGHT



Item No: PY12X2 RGB

Input Voltage (V) : 240VAC 50/60Hz
Operating Current(mA) : 1160
Power(W) : 28±0.5W
Light Source : 12*2W RGBin1
Lumen(Lm) : 617
Color Temperature(K) :
Wavelength(nm) : red=620-630nm
green=520-530nm
blue=460-470nm
LED beam angle() : 110 °
Full light beam angle() : 25
LED Power(W) : 24
Reality of color(Ra) : /
Ground impedance (MΩ) : >20
High voltage insulation(Kv) : 0.5(3S)

2.Fixture Specification

Weight(Kg) : ~ 2,4
Full fixture size(mm) : D×H=158×196mm
Cover/Glass (mm) : Alum-φ158*44.8mm/φ138*4.0mm
Housing (mm) : Alum-φ158*44mm
Gasket : Silicon , 45 degree
Cable : 1M H05RN-F 4×0,75MM²
IP grade : IP65

3.Quality Warranty

LED light maintenance rate : 1000Hs <5% (25°C)



BS LIGHT

HIGH POWER OUTDOOR SPOTLIGHT





Item No: PY12X2

Input Voltage (V) : 240VAC 50/60Hz
 Operating Current(mA) : 79
 Power(W) : $18 \pm 0.5W$
 Light Source : 12*1.5W OSRAM LED
 Lumen(Lm) : 1385
 Color Temperature(K) : 3000
 Wavelength(nm) : /
 LED beam angle() : 80 °
 Full light beam angle() : 20 °
 LED Power(W) : 16
 Reality of color(Ra) : ≥ 80
 Ground impedance (MΩ) : >20
 High voltage insulation(Kv) : 0.5(3S)



PY12X2

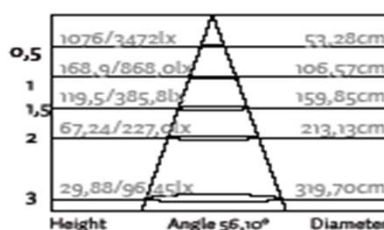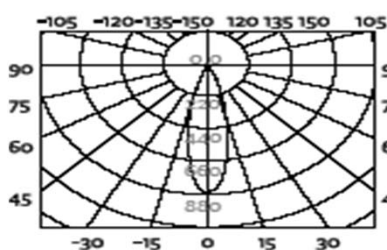

2. Fixture Specification

Weight(Kg) : ~ 2,4
 Full fixture size(mm) : D×H=158×196mm
 Cover/Glass (mm) : Alum-φ158*44.8mm/φ138*4.0mm
 Housing (mm) : Alum-φ158*44mm
 Gasket : Silicon , 45 degree
 Cable : 2M H05RN-F 3×1.0MM²
 IP grade : IP65

3. Quality Warranty

LED light maintenance rate : 1000Hs <5% (25°C)