




TIRAS FLEXIBLES MONOCOLOR 120 LEDS/m
3528 IP66
SINGLE-COLOR FLEXIBLE STRIPS
120 LEDS/m 3528 IP66



Rollo de tira flexible de 5 mts monocolor 120 LEDS/m. Se puede cortar cada 6 LEDS (50mm). Se suministra con adhesivo 3M de doble cara. Protección IP66.

5 mts Flexible strip roll single-color with 120 LEDS/m. Can be cut every 6 LEDS (50mm). Provided with 3M double side adhesive. IP66 protection.

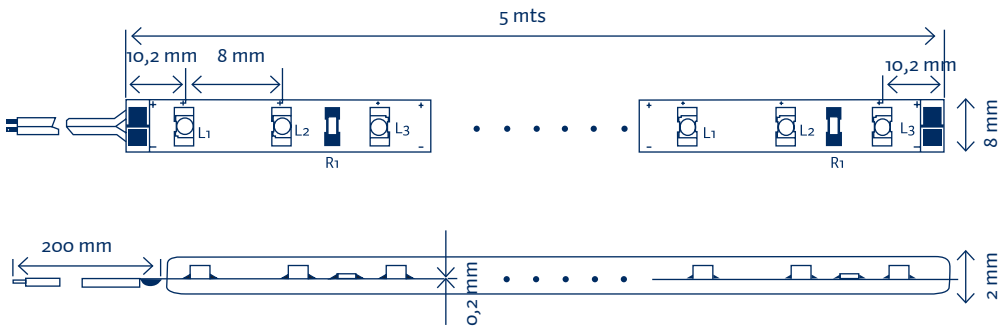

	COLOR COLOR	PROTECCIÓN PROTECTION	ALIMENTACIÓN POWER SUPPLY	TIPO LED LED TYPE	CANT. mts Qty OF LED	FLUJO LUM. LUM. FLOW	CONSUMO CONSUME
TF5R-600-IP66		IP 66	24V DC	3528	120 LEDS/ m	240lm/m	9,6W/ m
TF5AB-600-IP66		IP 66	24V DC	3528	120 LEDS/ m	240lm/m	9,6W/ m
TF5AZ-600-IP66		IP 66	24V DC	3528	120 LEDS/ m	300lm/m	9,6W/ m
TF5V-600-IP66		IP 66	24V DC	3528	120 LEDS/ m	480lm/m	9,6W/ m
TF5BF-600-IP66	6000 K	IP 66	24V DC	3528	120 LEDS/ m	780lm/m	9,6W/ m
TF5BD-600-IP66	4000 K	IP 66	24V DC	3528	120 LEDS/ m	760lm/m	9,6W/ m
TF5BC-600-IP66	3000 K	IP 66	24V DC	3528	120 LEDS/ m	720lm/m	9,6W/ m

Fuente de alimentación recomendada para un rollo de 5 mts LRS7524 (24V 75W) / Recommended power supply for a 5 mts roll: LRS7524 (24V 75W)