



TIRAS FLEXIBLES MONOCOLOR O RGB

30 LEDS/m 5050 IP33


RGB OR SINGLE-COLOR FLEXIBLE STRIPS

30 LEDS/m 5050 IP33



Rollo de tira flexible de 5 mts monocolor o RGB con 30 LEDS/m 5050. Se puede cortar cada 3 LEDS (100mm). Se suministra con adhesivo 3M de doble cara. Protección IP33. 36W de consumo total el rollo de 5 mts.

5 mts Flexible strip roll single-color or RGB with 30 LEDS/m 5050. Can be cut every 3 LEDS (100mm). Provided with 3M double side adhesive. IP33 protection. 5 mts roll total consume is 36W.

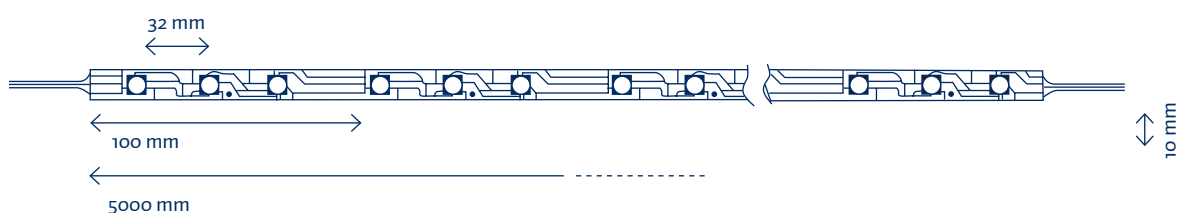

	COLOR COLOR	PROTECCIÓN PROTECTION	ALIMENTACIÓN POWER SUPPLY	TIPO LED LED TYPE	CANT. mts Qty OF LED	FLUJO LUM. LUM. FLOW	CONSUMO CONSUME
TF5R-AP		IP 33	12V DC	5050	30 LEDS/m	180lm/m	7,2W/ m
TF5AB-AP		IP 33	12V DC	5050	30 LEDS/m	180lm/m	7,2W/ m
TF5AZ-AP		IP 33	12V DC	5050	30 LEDS/m	225lm/m	7,2W/ m
TF5V-AP		IP 33	12V DC	5050	30 LEDS/m	360lm/m	7,2W/ m
TF5BF-AP	6000 K	IP 33	12V DC	5050	30 LEDS/m	585lm/m	7,2W/ m
TF5BD-AP	4000 K	IP 33	12V DC	5050	30 LEDS/m	570lm/m	7,2W/ m
TF5BC-AP	3000 K	IP 33	12V DC	5050	30 LEDS/m	550lm/m	7,2W/ m
TF5BSC-AP	2700K	IP 33	12V DC	5050	30 LEDS/m	540lm/m	7,2W/ m
TF5-AP-2300K	2300K	IP 33	12V DC	5050	30 LEDS/m	530lm/m	7,2W/ m
TF5RGB		IP 33	12V DC	5050	30 LEDS/m	60-120-75lm/m	7,2W/ m

Fuente de alimentación recomendada para un rollo de 5 mts LRS5012 (12V 50W) Para la tira RGB escoger también un controlador PWM /
Recommended power supply for a 5 mts roll: LRS5012 (12V 50W). For RGB strip also opt for a controller PWM