




## TIRAS FLEXIBLES MONOCOLOR O RGB 30 LEDS/m 5050 IP66 RGB OR SINGLE-COLOR FLEXIBLE STRIPS 30 LEDS/m 5050 IP66



Rollo de tira flexible de 5 mts monocolor o RGB con 30 LEDS/m 5050. Se puede cortar cada 3 LEDS (100mm). Se suministra con adhesivo 3M de doble cara. Protección IP66. 36W de consumo total el rollo de 5 mts.

5 mts Flexible strip roll single-color or RGB with 30 LEDS/m 5050. Can be cut every 3 LEDS (100mm). Provided with 3M double side adhesive. IP66 protection. 5 mts roll total consume is 36W.

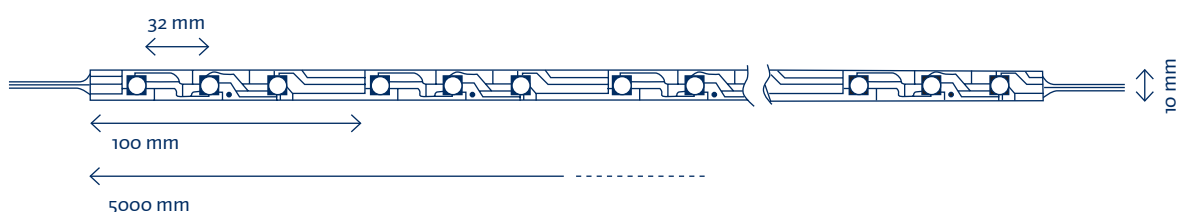

	COLOR COLOR	PROTECCIÓN PROTECTION	ALIMENTACIÓN POWER SUPPLY	TIPO LED LED TYPE	CANT. mts Qty OF LED	FLUJO LUM. LUM. FLOW	CONSUMO CONSUME
TF5R-AP-IP66		IP66	12V DC	5050	30 LEDS/m	180lm/m	7,2W/ m
TF5AB-AP-IP66		IP66	12V DC	5050	30 LEDS/m	180lm/m	7,2W/ m
TF5AZ-AP-IP66		IP66	12V DC	5050	30 LEDS/m	225lm/m	7,2W/ m
TF5V-AP-IP66		IP66	12V DC	5050	30 LEDS/m	360lm/m	7,2W/ m
TF5BF-AP-IP66	6000 K	IP66	12V DC	5050	30 LEDS/m	585lm/m	7,2W/ m
TF5BD-AP-IP66	4000 K	IP66	12V DC	5050	30 LEDS/m	570lm/m	7,2W/ m
TF5BC-AP-IP66	3000 K	IP66	12V DC	5050	30 LEDS/m	550lm/m	7,2W/ m
TF5BSC-AP-IP66	2700K	IP66	12V DC	5050	30 LEDS/m	540lm/m	7,2W/ m
TF5-AP-2300K-IP66	2300K	IP66	12V DC	5050	30 LEDS/m	530lm/m	7,2W/ m
TF5RGB-IP66		IP66	12V DC	5050	30 LEDS/m	60-120-75lm/m	7,2W/ m

Fuente de alimentación recomendada para un rollo de 5 mts LRS5012 (12V 50W). Para la tira RGB escoger también un controlador PWM /  
Recommended power supply for a 5 mts roll: LRS5012 (12V 50W). For RGB strip also opt for a controller PWM