




TIRAS FLEXIBLES MONOCOLOR O RGB 60 LEDS/m 5050 IP66

RGB OR SINGLE-COLOR FLEXIBLE STRIPS 60 LEDS/m 5050 IP66



Rollo de tira flexible de 5 mts monocolor o RGB con 60 LEDS/m 5050. Se puede cortar cada 6 LEDS (100mm). Se suministra con adhesivo 3M de doble cara. Protección IP66. 72W de consumo total el rollo de 5 mts.

5 mts Flexible strip roll single-color or RGB with 60 LEDS/m 5050. Can be cut every 3 LEDs (100mm). Provided with 3M double side adhesive. IP366 protection. 5 mts roll total consume is 72W.

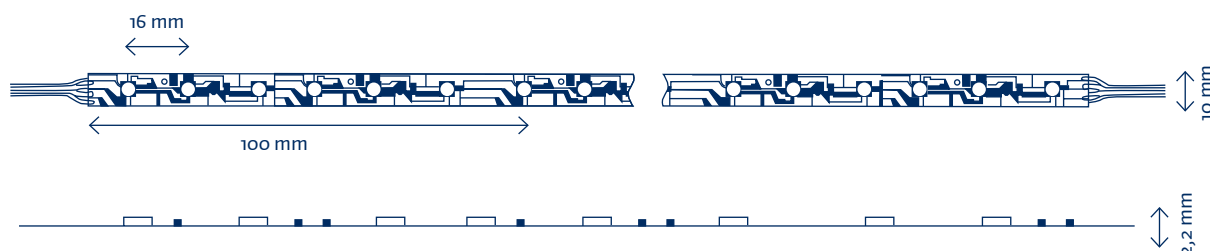

	COLOR COLOR	PROTECCIÓN PROTECTION	ALIMENTACIÓN POWER SUPPLY	TIPO LED LED TYPE	CANT. mts Qty OF LED	FLUJO LUM. LUM. FLOW	CONSUMO CONSUME
TF5R-AP-300-IP66		IP66	24V DC	5050	60 LEDS/m	360lm/m	14,4W/ m
TF5AB-AP-300-IP66		IP66	24V DC	5050	60 LEDS/m	360lm/m	14,4W/ m
TF5AZ-AP-300-IP66		IP66	24V DC	5050	60 LEDS/m	450lm/m	14,4W/ m
TF5V-AP-300-IP66		IP66	24V DC	5050	60 LEDS/m	720lm/m	14,4W/ m
TF5BF-AP-300-IP66	6000 K	IP66	24V DC	5050	60 LEDS/m	1170lm/m	14,4W/ m
TF5BD-AP-300-IP66	4000 K	IP66	24V DC	5050	60 LEDS/m	1162lm/m	14,4W/ m
TF5BC-AP-300-IP66	3000 K	IP66	24V DC	5050	60 LEDS/m	1140lm/m	14,4W/ m
TF5BSC-AP-300-IP66	2700K	IP66	24V DC	5050	60 LEDS/m	1122lm/m	14,4W/ m
TF5-AP-300-2300K-IP66	2300K	IP66	24V DC	5050	60 LEDS/m	1101lm/m	14,4W/ m
TF5RGB-300-IP66		IP66	24V DC	5050	60 LEDS/m	120-240-150lm/m	14,4W/ m

Fuente de alimentación recomendada para un rollo de 5mts: LRS10024 (24V 100W). Para la tira RGB escoger también un controlador PWM / Recommended power supply for a 5 mts roll: LRS10024 (24V 100W). For RGB strip also opt for a controller PWM